

Product Data Sheet

Varnishing cabins

NewPro cooperates with the producer of varnishing cabins. Your individual requirements concerning the set-up of a varnishing cabin will be factored in. Place your enquiries in writing to NewPro.

The combined varnishing cabins 16-30 meet the newest DIN-EU norm.

TÜV-CE-DVWG

Air capacity from 16.000 to 30.000 cbm/h

Energy-saving appliance

Noise only 60 dB/A

Stainless steel heat exchanger


Lighted by daylight tubes

Safety glass panes

Automated temperature switch

Irrotational draft

Standard sizes: lengths between 5,95 m to 17,70 m, width 3,90 m to 5,00 m, height 2,45 m to 5 m (all other measurements are custom-made)

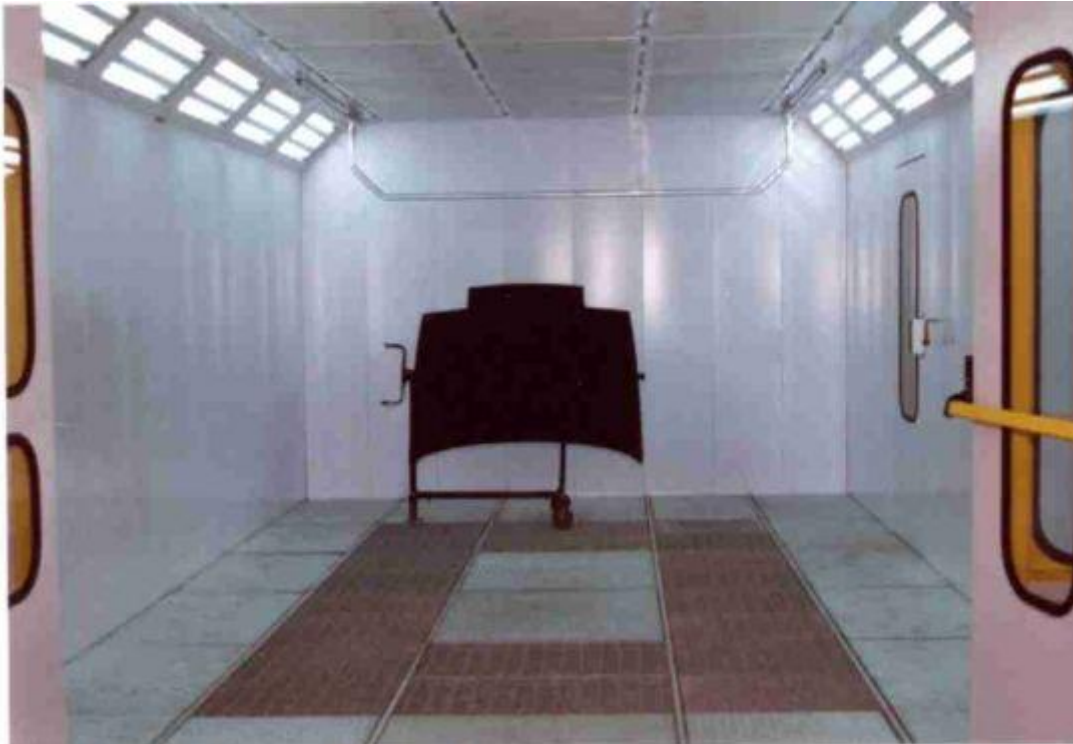

NewPro – New Products & Innovative Ideas for Surfaces
Lutz-Henning Robitzsch
Ricarda-Huch-Weg 2 D-40789 Monheim a. Rhein
Tel: +49 (0) 2173/964280 Fax: +49 (0) 2173/964282
eMail: news@newpro.de Internet: www.g-pro.com

**GRAFFITI
MAGIC**



Combined varnishing cabin 2x30 diagonal

Special design for large parts

L 16,00 m x B 8,00 m x H 6,50 m

L 16,00 m x B 8,00 m x H 6,50 m

Dialog-exhaustion, with four additional continuous light-bands in the side walls and two additional continuous light-bands in the rear wall, air capacity 2x 30.000 cbm/h, individually switchable, heating capacity 2x30 kW

